



# KV1284

## Euro-Style Side Mount Drawer Slide 100# Rating

### INSTALLATION INSTRUCTIONS FOR THE KV1284 DRAWER SLIDE

*Note:* When replacing existing drawer slides, confirm that the new slide:

- has a load rating that will accommodate the anticipated drawer load
- used a similar mounting style
- is the correct length
- will fit within the available clearance between drawer and cabinet

Each package contains:

- 1 left hand cabinet member (CL)
- 1 right hand cabinet member (CR)
- 1 left handed drawer member (DL)
- 1 right handed drawer member (DR)
- 16 flat head screws (4 per member) (#6 x 7/16", KV#200249-1)

For drawer lift-out, allow 1" (25.4mm) clearance between drawer side height and drawer case opening height. Drawer width must be between 1" and 1 1/8" (25.4-27mm) less than the cabinet opening.

*Note:* For drawer slide installation in new cabinets, skip to the "Installation - New Cabinetry" section.

#### Installation - Existing Cabinetry

1. Remove the drawer.  
Remove the contents from the drawer and remove it from the cabinet.
2. Remove the existing drawer slide(s) from the drawer and cabinet.
3. Prepare the cabinet and drawer to accept new drawer slide. Fill holes, sand rough spots that might interfere with mounting new drawer slides, and make any other needed repairs.

See the "Installation - New Cabinetry" section.

#### Installation - New Cabinetry

##### 1. Identify the slide members.

Each slide member is stamped with an identification:

- CL = Cabinet member, left hand
- CR = Cabinet member, right hand
- DL = Drawer member, left hand
- DR = Drawer member, right hand

##### 2. Install drawer members.

Rest drawer members on the bottom lip of the drawer, with roller positioned toward the rear of the drawer. Place the front edge of each member against the rear face of the drawer front. Fasten drawer members (using four flat head screws per member), through either the side or bottom screw holes.

##### 3. Install cabinet members.


Based on the cabinet types, choose from the following instructions:

For 32mm frameless cabinets: Check the hole pattern of cabinet members with that of the cabinet - the hole pattern on the inside of the cabinet front should be set back 37mm from the cabinet face. Place the cabinet member 2mm from the front edge of the cabinet, in order to align it with the cabinet's vertical 32mm Euro hole pattern. Vertically align and fasten each member (using four screws per member) in the required location, given the size and location of each drawer.



For face frame cabinets: Place each cabinet member flush with the front and bottom of the cabinet opening, with rollers located at the front. Make sure that the members are perpendicular to the cabinet front, parallel, and in a level position. If necessary, shim the slide to insure that it is parallel with the side of the cabinet. Fasten each cabinet member in place, using two screws in the front and back mounting slots. If desired, mount each cabinet member to the inside back panel of cabinet, using a KV #1284-3 rear mounting bracket (not included).

##### 4. Insert, adjust, and secure.


Insert the drawer, guide the drawer member rollers over the cabinet member rollers. Open and close drawer to check for proper fit and operation. Adjust as necessary. Then add the remaining screws to securely fasten cabinet members. (To remove the drawer, pull it to the locked-out position, then lift and pull.)

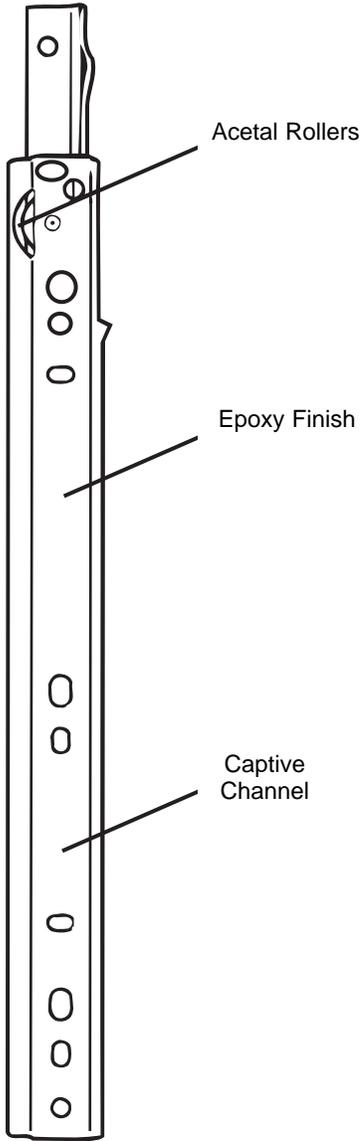

### Drawer Slide Mounting Profile

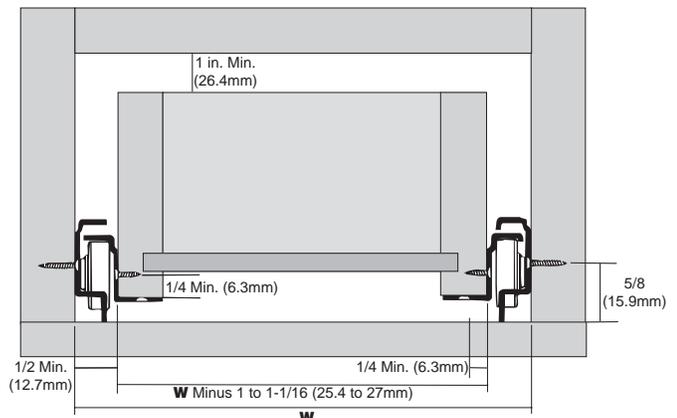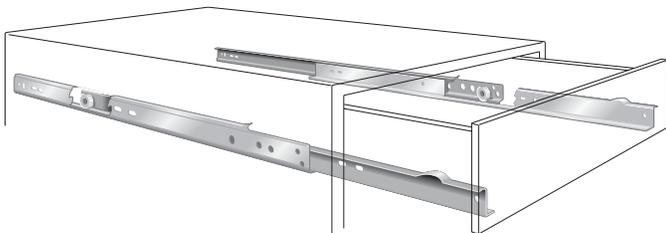

## Cabinet Member Dimensions

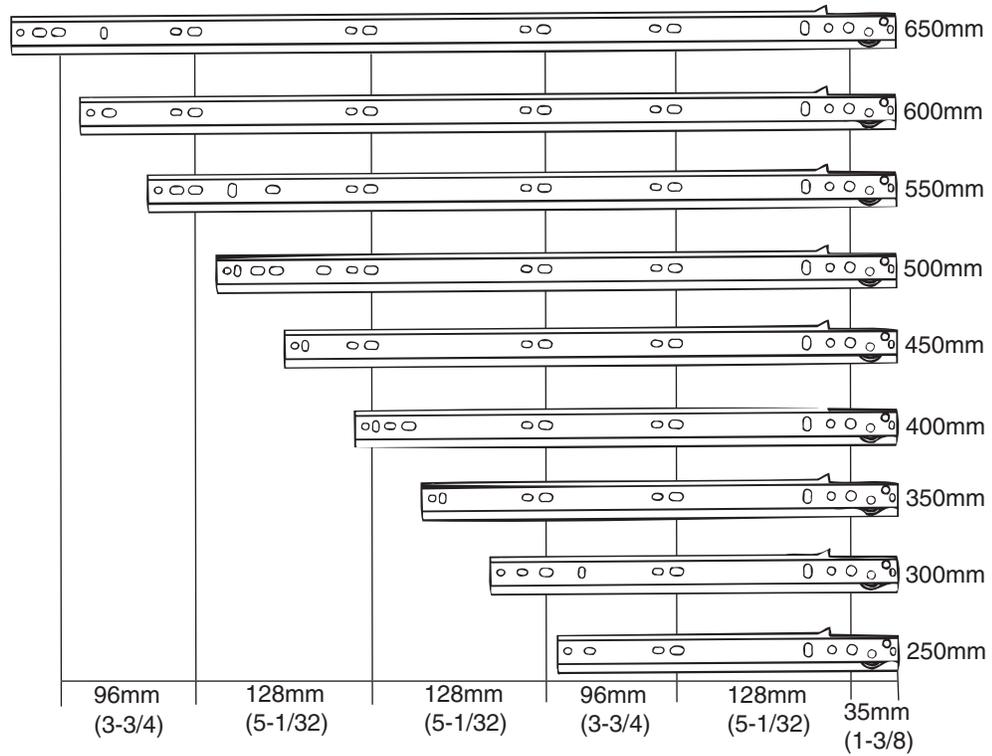

## Drawer Member Dimensions

