

SALICE Concealed Hinges, 120° Series 200

120° Self-Close Series 200 Euro Hinges

- Self-closing
- 11mm cup depth
- 35mm cup diameter
- Plates sold separately



Use the formulas below to determine the type of hinge arm, the drilling distance "K" and the mounting plate "H" necessary for the application.

K = drilling distance (3mm - 6mm)

H = mounting plate height


D = overlay of door on side panel or frame

A = reveal

T = door thickness

S = thickness of cabinet panel


120° - Full Overlay "A" Crank

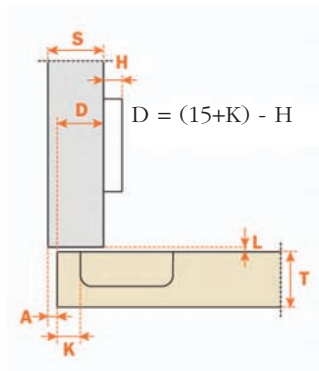

- SAC2P9A99** Screw on
- SAC2R9A99** Press in
- SAC279A99** Rapido
- SAC2J9A99** Logica

120° - 1/2" Overlay "D" Crank

Popular for use with face frame cabinets



$$D = (10+K) - H$$

For a 1/2" overlay:


D = 13mm

K = 4mm

H = 1mm

- SAC2P9D99** Screw on
- SAC2R9D99** Press in
- SAC279D99** Rapido
- SAC2J9D99** Logica

120° - Half Overlay "G" Crank

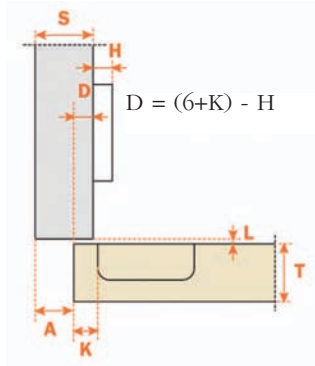

- SAC2P9G99** Screw on
- SAC2R9G99** Press in
- SAC279G99** Rapido
- SAC2J9G99** Logica

Smove Soft Closing Piston

- Soft-close add on
- To be used with normal doors with 2-3 hinges



SAD0LHSNG

Cover Cap

- Nylon symmetrical screw cap
- For Series 200 & F hinges
- Does not work with 155° or 165° hinges



SAS2XX83A3 Black

Millimeter to inch equivalents

1	1.5	2	3	4	5	5.5	6	7	8	9	9.5	10	11	12	13	14	15	16	17	17.5	18	19	20	20.5	21	22	23	24	24.5	25.4
1/32	1/16	3/32	1/8	5/32	3/16	7/32	1/4	9/32	5/16	11/32	3/8	13/32	7/16	15/32	1/2	9/16	19/32	5/8	21/32	11/16	23/32	3/4	25/32	13/16	27/32	7/8	29/32	15/16	31/32	1