


Particulate Respirator 9211, N95

Issue Date 06/01/00

Workers want respirators that are comfortable, lightweight and convenient. That's why 3M, with its long experience in filtration technologies, designed a family of respirators that provides high levels of comfort and value.

Features & Benefits

- **Meets NIOSH 42 CFR 84 N95 requirements. TC-84A-2668**
- **Three-panel respirator with innovative design**
 - Low profile for better visibility and compatibility with a wide variety of safety equipment.
 - Conforms to a wide range of face sizes.
 - Offers convenient storage and portability prior to use.
 - Central positioning of the 3M™ Cool Flow™ Exhalation Valve allows for efficient performance.
- **Soft cover web on inner panel**
 - Feels comfortable against the skin.
- **Soft nose foam pad, and conformable nose clip**
 - Adjusts easily.
 - Helps provide a custom fit and secure seal.
 - Reduces the potential for eyewear fogging.
- **Individually packaged**
 - Prevents contamination during storage.
 - Helps increase worker acceptance.
 - Allows for easy dispensing.

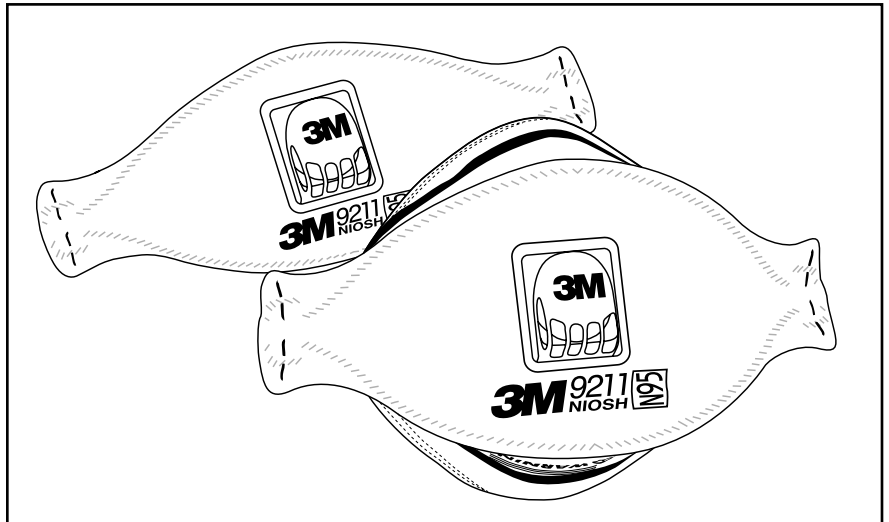

9211 Respirator.

- **3M™ Cool Flow™ Exhalation Valve**
 - Patented one-way valve offers easy exhalation and cool, dry comfort.
- **Lightweight, collapse-resistant design**
 - Promotes greater worker comfort.
 - Contributes to increased wear time.

Suggested Applications

- Grinding
- Sanding
- Sweeping
- Bagging
- General maintenance
- Other operations that create dust

Use For:

- Solids such as those from textile operations, dry chemical handling, surface preparation, food preparation and handling, woodworking, grain handling


and milling, processing minerals and coal and certain other substances.

- Liquid or non-oil based particles from sprays that do not also emit harmful vapors.

WARNING !

This respirator helps protect against certain particles. Misuse may result in sickness or death. For proper use, see supervisor or instructions or call 3M OH&ESD at 1-800-247-3941. In Canada, call 1-800-267-4414.


Do Not Use For:
Gases, vapors, including those present in paint spraying operations, oil aerosols, asbestos or sandblasting. Aerosol concentrations that exceed 10 times the OSHA PEL, or applicable government regulations, whichever is lower. This respirator does not supply oxygen.

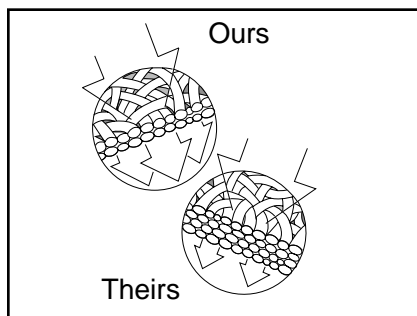

Advanced Electret Media. Advanced electrostatically charged microfibers help make breathing easier and cooler.



Three-Panel. Designed for comfort and convenience.

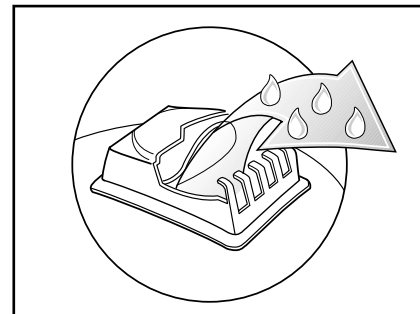

Cool Flow™ Exhalation Valve. Patented one-way valve for easy exhalation and cool, dry comfort.

Patented Technologies

Other products to consider include:

- 3M™ Particulate Respirator N95 Model 9210
- 3M™ Particulate Respirator N95 Model 8511

Fit Testing

Before use of this respirator, a written respirator protection program must be implemented meeting all the requirements of OSHA 20 CFR 1910.134 such as training and fit testing.

Time Use Limitation

If respirator becomes damaged, soiled, or breathing becomes difficult, leave the contaminated area immediately and replace the respirator.

Additional Information

This respirator contains no components made from natural rubber latex.

Please contact your local 3M distributor to place an order. To determine the location of the 3M distributor nearest you, call 1-800-328-1667. In Canada call 800-265-1840 extension 6137.

3M Occupational Health and Environmental Safety Division
3M Center, Building 235-2W-70
St. Paul, MN 55144-1000

Technical Assistance U.S.
1-800-243-4630

Sales Assistance U.S.
1-800-896-4223

Fax On Demand U.S. and Canada
1-800-646-1655

Fax On Demand Outside U.S. and Canada
651-732-0131

Internet
www.3M.com/occsafety

E-mail
occsafety@mmm.com

For other 3M products
1-888-3M HELPS

In Canada, contact:
3M Canada Company, OH&ESD
P.O. Box 5757
London, Ontario N6A 4T1
1-800-267-4414
or 1-800-265-1840, ext. 6137

Internet
www.3M.com/intl/CA/ohes.html

3M Canada E-mail
ohes@ca.mmm.com

Technical Assistance In Mexico
01-800-712-0646

Technical Assistance In Brazil
0800-550705