



12VDC

NEW!

White Tunable FlexTape®

3W/ft.
(9.8W/m)

345 Lumens
per ft.
(1132 per meter)



Changing your light source's color temperature is easy with Tresco® White Tunable CCT FlexTape® lighting solution. Select between warmer lighting that highlights natural wood grains and earth tones or cool lighting to highlight whites; perfect for cabinet, task or accent lighting and store fixtures. The low profile and adhesive 3M™ backing give this LED lighting solution the versatility to install in a multitude of places. Eliminate the guesswork and get the LED that pairs perfectly with your general lighting and overall design.

Features:

115° beam angle

High output (345 lumens per ft.)

White tunable from 2700K-6500K

Sold in 16.4' (5 m) roll

Cutttable every 1" (25 mm)

No soldering required – simple FlexConnect connectors (sold separately)

Precision tunable remote controls (sold separately)

Typical Applications:

Under Cabinet

Interior Cabinets

Accent Lighting

Displays

Task Lighting

Store fixtures



Toe kick

Soffit

Backlighting



Dimensions:



White Tunable FlexTape® can be used as a DIY option for flush and recessed Infinex. For other profiles, must be custom ordered.



2700K



3500K



6500K

Cutttable every 1" (25 mm)

Eliminate the guesswork and get the LED that pairs perfectly with your general lighting and overall design.




No soldering required – simple FlexConnect connectors (sold separately)




Strong 300 LSE 3M™ adhesive backing

Typical Setup:

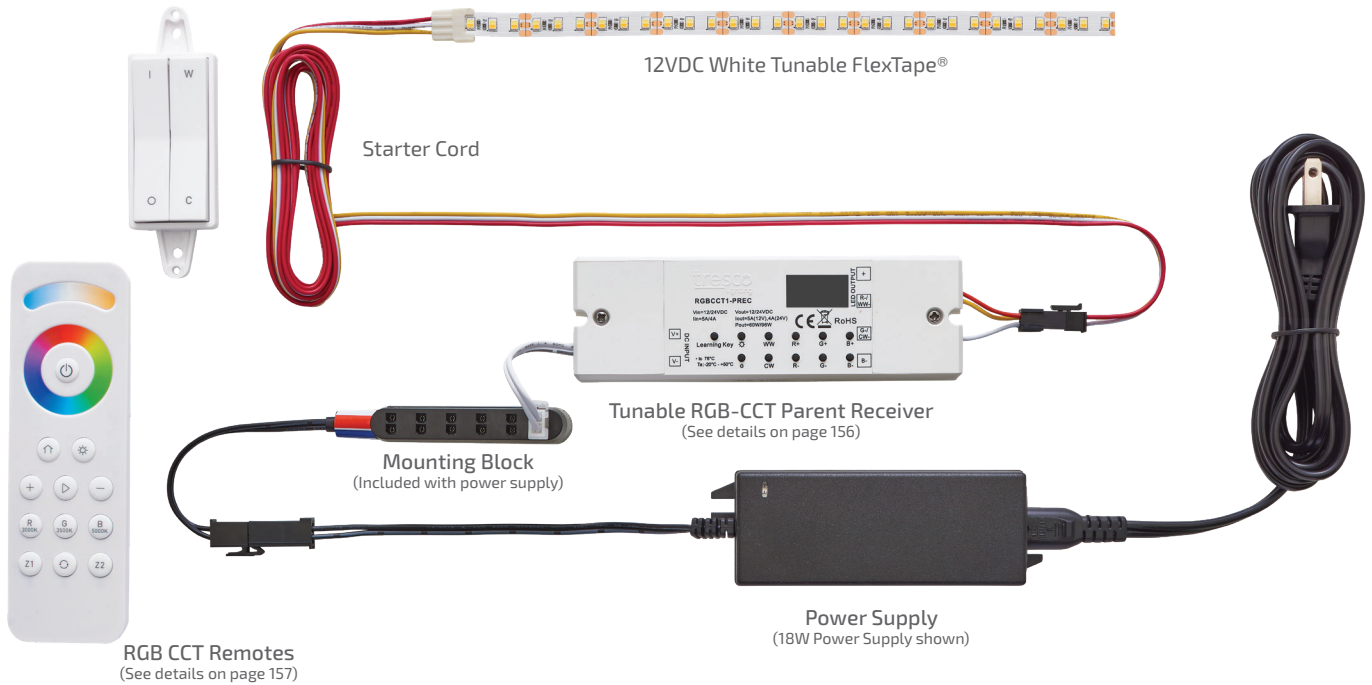

- Required
- Optional

Accessories:

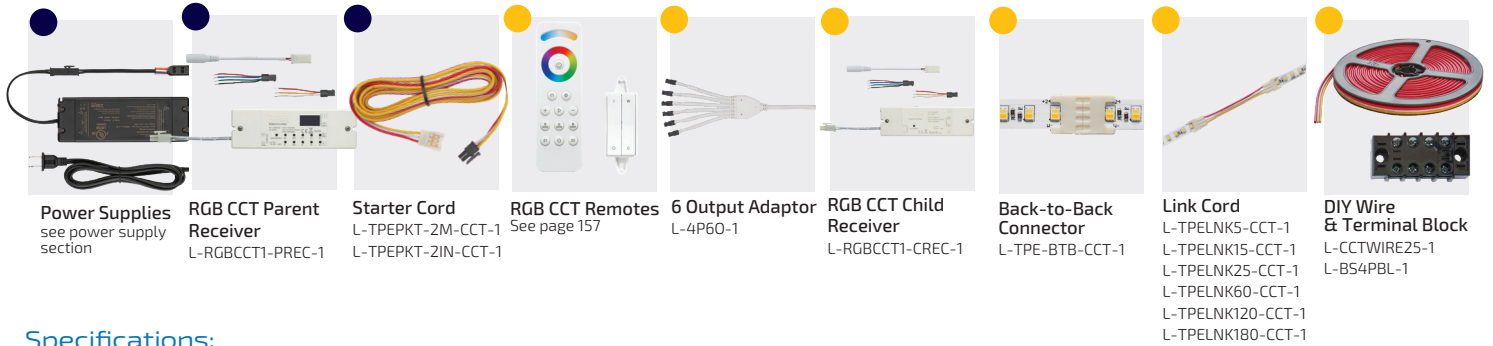

Specifications:


Wattage	Lumens	Efficacy (lm/W)	Input Voltage	Diode Life	Max Per Power Supply 60W	Max Continuous Run	Mounting	Warranty	Beam Angle
3W/ft. (9.8W/m)	345 per ft. (1132 per m)	115	12VDC	50,000 Hours	20' (6 m)	16.4' (5 m)	Surface	5 Year	
Photometric Data					Color Temperature				
	Height	Light Output	Beam Area						
	1ft (.3 m)	114Fc (1227lx)	3.2ft L x 3ft W (.97 m L x .91 m W)						
	3ft (.9 m)	12.7Fc (136.7lx)	9.7ft L x 9ft W (2.9 m L x 2.7 m W)						
	6ft (1.8 m)	3.17Fc (34.1lx)	19.4ft L x 18.1ft W (5.9 m L x 5.5 m W)		Warm (2700K) Daylight (6500K)				
L-FLXTPE-12CCT-1 Tested at 4600K									

Tunable Tape

All product dimensions and specifications are subject to change without prior notice.

- Required
- Optional

● 12VDC White Tunable FlexTape®

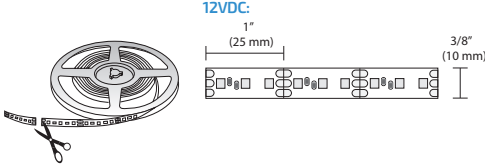

Part #	Description
L-FLXTPE-12CCT-1	12VDC 3W/FT CCT FlexTape® 16.4' (5 m) Roll

Maximum continuous run is 16.4' (5 m). Maximum per power supply is 12VDC: 20' (6 m), 24VDC: 30' (5 m). Mounts with adhesive backing. 12VDC is cuttable every 1" (25 mm), 24VDC is cuttable every 2" (50 mm). To be used on clean, smooth surfaces. Pressure must be applied for proper 3M™ tape adhesion.

● 12VDC Power Supplies



Part #	Description
L-DC-ELT18-CON-1	18W 12VDC Power Supply w/6 Snap Mounting Block*
L-DC-SLELT30-1	30W 12VDC Power Supply w/6 Snap Mounting Block*
L-DC-SLELT60-1	60W 12VDC Power Supply w/6 Snap Mounting Block*
L-DC-ELT6WP-CON-1	6W 12VDC Wall Mount Power Supply w/3 Snap Block*
L-DC-ELT15WP-CON-1	15W 12VDC Wall Mount Power Supply w/6 Snap Block*
L-DC-EQ30-1	30W 12VDC Equiline Power Supply w/6 Snap Block*
L-DC-EQ60-1	60W 12VDC Equiline Power Supply w/6 Snap Block*
L-DCE30D-CON-1	30W 12VDC Hardwire Dimmable LED Power Supply†
L-DCE60D-CON-1	60W 12VDC Hardwire Dimmable LED Power Supply†
L-12DCH60X1-1	60W 12VDC Commercial/Industrial Metal Hardwire Dimmable Power Supply‡
L-12DCH60X3-1	180W 12VDC Commercial/Industrial Metal Hardwire Dimmable Power Supply‡


* Dimmable on trailing edge (12VDC side). Mounting block and power cord are included.

† Dimmable by LED line voltage (120V) wall dimmers. Mounting block included.

‡ Dimmable by LED line voltage (120V) wall dimmers. Mounting block not included

All hardwire power supplies require an electrician for install.

● 12/24VDC CCT Starter Cord

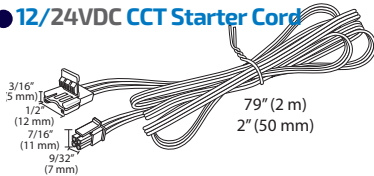


Part #	Description
L-TPEPKT-2M-CCT-1	2 m (79") FlexTape CCT Starter Lead
L-TPEPKT-2IN-CCT-1	50 mm (2") FlexTape CCT Starter Lead

5/8" (16 mm) hole required.

Maximum linear run of White Tunable FlexTape® LED from one starter cord is 16.4' (5 m).

● 12/24VDC RGB-CCT Receivers

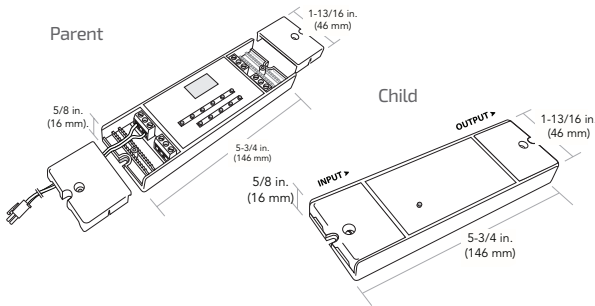

Part #	Description
L-RGBCCT1-PREC-1	12/24VDC RGB CCT Parent Controller/Receiver
L-RGBCCT1-CREC-1*	12/24VDC RGB CCT Child Controller/Receiver


*Child Receiver is optional
6 output adaptor sold separately

Tunable Tape

All product dimensions and specifications are subject to change without prior notice.


- Required
- Optional

12/24VDC RGB-CCT Remotes

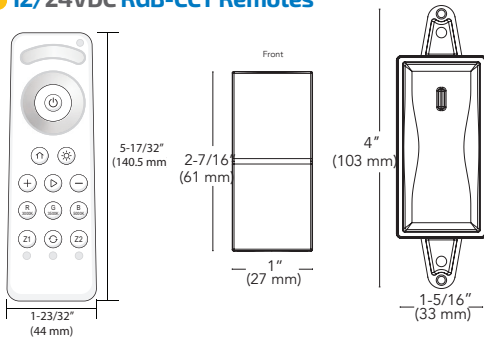


Part #	Description
L-RGBCCT-RMT-1	RGB CCT Wireless Remote
L-WLD-CCT-WH-1	CCT FREEDiM Deco Wall Dimmer White
L-WLD-RGB-WH-1	RGB FREEDiM Deco Wall Dimmer White

12/24VDC Starter CCT Extension Leads




Part #	Description
L-CCTEXT-60-1	60 cm (24") CCT FlexTape Starter Extension Lead
L-CCTEXT-120-1	120 cm (48") CCT FlexTape Starter Extension Lead

12/24VDC CCT Back-to-Back Connector




Part #	Description
L-TPE-BTB-CCT-1	CCT FlexTape® Back-to-Back Connector

12/24VDC 6 Output Adaptor




Part #	Description
L-4P60-1	4 Position, 6 Output Adaptor - White

12/24VDC CCT Link Cords

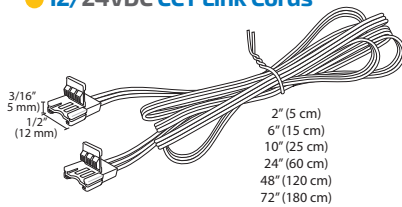

Part #	Description
L-TPELNK5-CCT-1	5 cm (2") CCT FlexTape® Link Cord
L-TPELNK15-CCT-1	15 cm (6") CCT FlexTape® Link Cord
L-TPELNK25-CCT-1	25 cm (10") CCT FlexTape® Link Cord
L-TPELNK60-CCT-1	50 cm (24") CCT FlexTape® Link Cord
L-TPELNK120-CCT-1	120 cm (48") CCT FlexTape® Link Cord
L-TPELNK180-CCT-1	180 cm (72") CCT FlexTape® Link Cord

12/24VDC CCT DIY

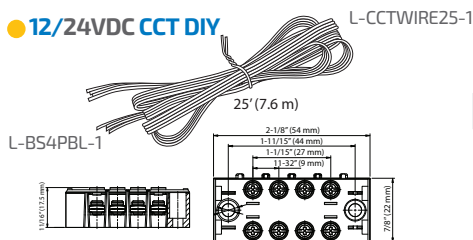

Part #	Description
L-CCTWIRE25-1	25' (7.6 m) 20AWG CCT Wire Roll
L-BS4PBL-1	12/24VDC Barrier Splice 4 Position Black