


New CLIP top 155° zero protrusion hinge


Product
CLIP top 155°
Information

Application

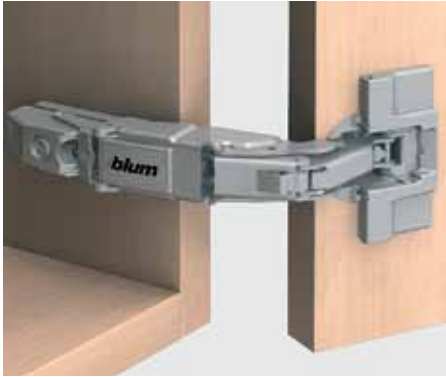

Description

- For use with cabinets with interior roll-outs
- Can be used with 973A7000 BLUMOTION for doors
- New boring distance range from 3 mm — 8 mm
- Self closing starts at 30°
- Three-dimensional adjustment
- Smaller hinge cup footprint

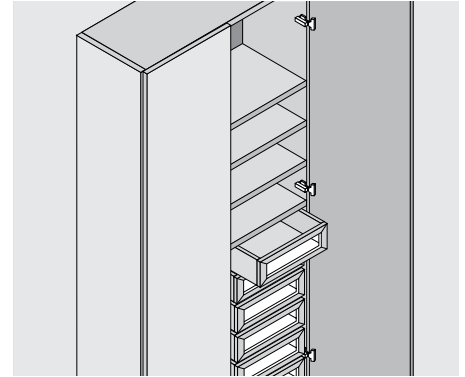

Frame cabinet applications

Overlay door

NOTE: 175H6xxx or 175L6600.24 recommended

Panel cabinet applications

Overlay door

Straight-arm hinges		Self close
Screw-on		71T7500N
Press-in		71T7530N
INSERTA		71T7540N

Overlay table								
0	14	15	16	17	18	19	-2.3	61
3	11	12	13	14	15	16	.7	64
H	3	4	5	6	7	8	P	S
Plate	B Bore distance						Clearances	

11 fixed distance

Hinge cup dimensions

NOTE: Smaller footprint, for use with narrow frame doors

BLUMOTION for doors

- For use with new zero protrusion hinge only
- Minimal protrusion into the cabinet opening
- Designed for one BLUMOTION per self closing hinge, however quantity may vary depending on door size and weight

BLUMOTION for doors	973A7000
---------------------	----------

Angle restriction clip

- For use with new zero protrusion hinge only
- Restricts opening angle to 110°

Part no. **70T7503N**

Cover cap

- For use with new zero protrusion hinge
- Stainless steel
- Custom logo available

Part no. **70.7503**

Universal insertion ram

- For use with all Euro hinges

Part no. **MZM.0040**