
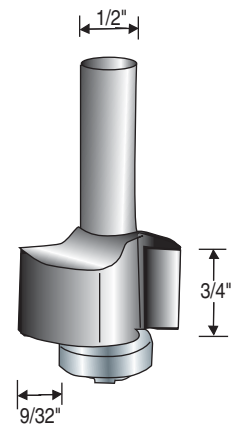



**Fig. 1
Routing Backsplash**

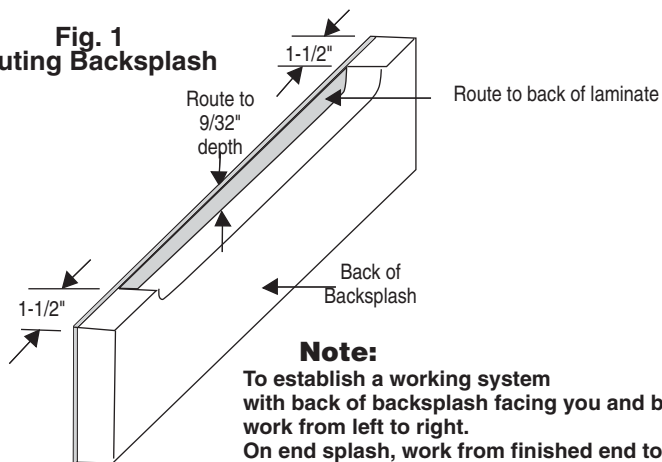


Eliminate errors in routing with a SC-1 Router Bit available through your distributor

Old Spacing Bar #5A

**Fig. 2
Drilling first hole**

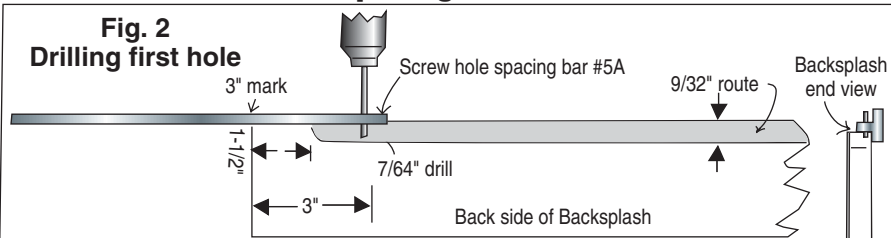


**Fig. 3
Drilling holes 2, 3, 4, etc.**

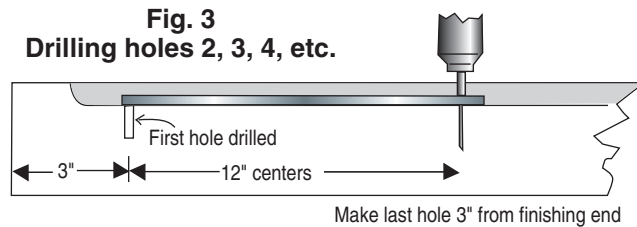

New Spacing Bar # 5B

**Fig. 2
Drilling first hole**

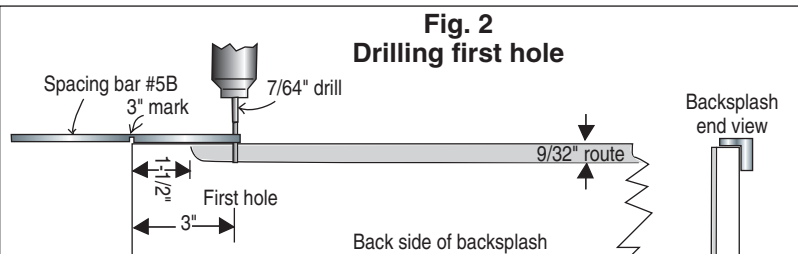

**Fig 3
Drilling holes 2, 3, 4, etc.**

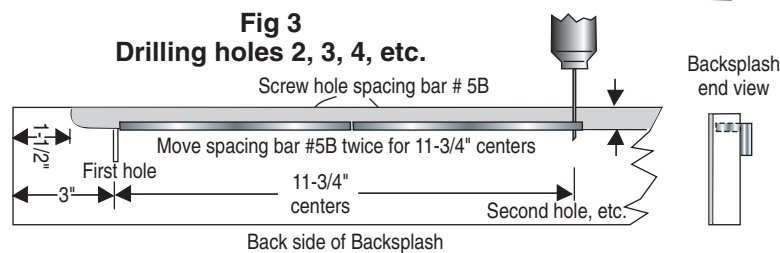


Fig. 4
Setting 1-1/2" screws in predrilled holes

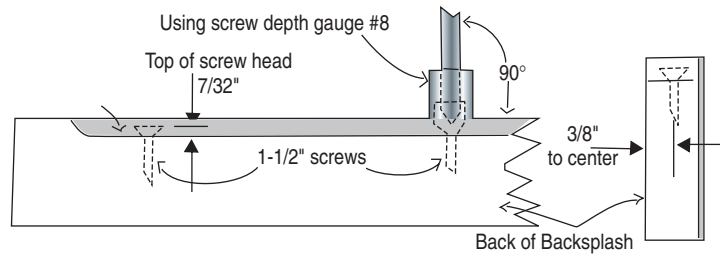


Fig. 5
Securing Smart Clips to counter top

NOTE:
Secure front of counter only
Secure back of counter after Backsplash is in place



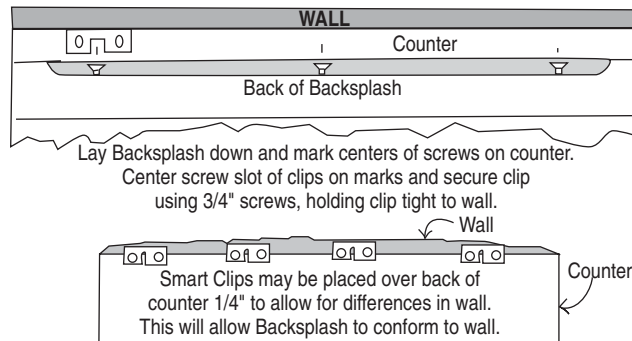


Fig. 6
Securing Backsplash into position

1 After Smart Clips are in place, apply 1/4" caulk bead in front of Smart Clips.

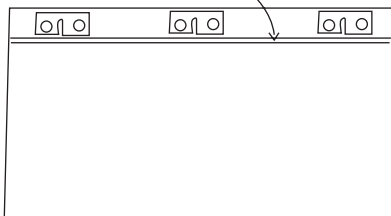

2 After caulk bead is in place, align backsplash in front of Smart Clips. Using a block of wood and hammer, drive in place at clip location. Backsplash is now part of the top and not the wall as when glued. Eliminates mastics, metals, front caulking, ugly cracks and provides a lasting waterproof fit.

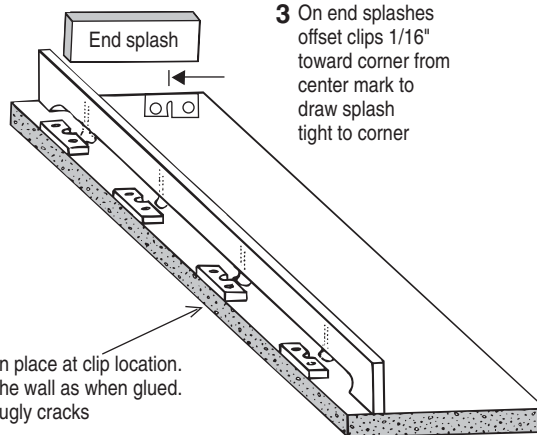

3 On end splashes offset clips 1/16" toward corner from center mark to draw splash tight to corner

Handy Backsplash Holder
For drilling and applying screws to Backsplash

