


SSP386XY 1.5 mm (1/16") shim for face frame hinges available. Excentra only.

SSP386XY Espesor 1.5 mm (1/16") disponible para bisagras para marco.

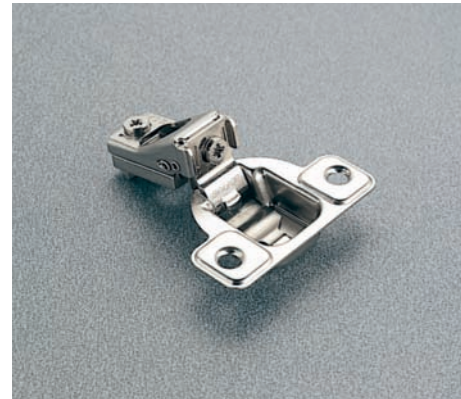

	106° ø35	106° ø35	106° ø35	106° ø35	box caja



S/C	CSP3Y99	CSP3Z99	CSP3999	CSP3899	300
S/C	CSR3Y99	CSR3Z99	CSR3999	CSR3899	300
	1/4" 	5/16" 	3/8" 	7/16" 	
Suggested frame fixing screw # 10 x 3/4" RHP - For all hinges with pre-assembled spacer. Tornillo de fijación aconsejado para marco # 10 x 3/4" RHP - Para todas las bisagras con espaciador premontado.					

S/C	CSP3799	CSP3699	CSP3599	CSP3499	300
S/C	CSR3799	CSR3699	CSR3599	CSR3499	300
	1/2" 	9/16" 	5/8" 	3/4" 	
Zero-door protrusion - Suggested frame fixing screw # 10 x 3/4" RHP - For remaining hinges. Puerta sin retroceso - Tornillo de fijación aconsejado para marco # 10 x 3/4" RHP - Para las bisagras restantes.					

S/C	CSP3299N	CSP3199N	CSP3A99N	CSP3B99N	300
S/C	CSR3299N	CSR3199N	CSR3A99N	CSR3B99N	300
	1" 	1 1/8" 	1 1/4" 	1 5/16" 	
Zero-door protrusion - Suggested frame fixing screw # 10 x 3/4" RHP. Puerta sin retroceso - Tornillo de fijación aconsejado para marco # 10 x 3/4" RHP.					

S/C	CSP3C99N	CSP3D99N			300
S/C	CSR3C99N	CSR3D99N			300
	1 3/8" 	1 7/16" 			
Zero-door protrusion - Suggested frame fixing screw # 10 x 3/4" RHP. Puerta sin retroceso - Tornillo de fijación aconsejado para marco # 10 x 3/4" RHP.					


Zero-door protrusion from 1/2" to 1 7/16" overlay.
Puerta sin retroceso cobertura de 1/2" a 1 7/16".

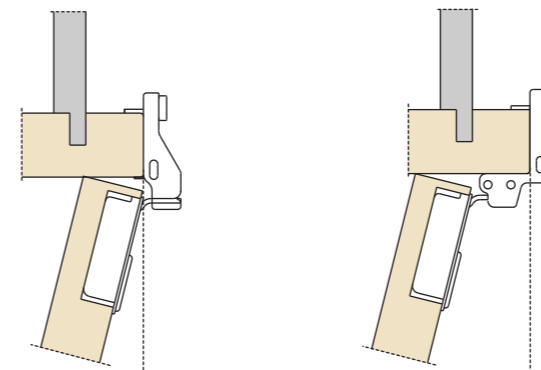

D = required door overlay
T = max. door thickness
K = drilling distance
A = reveal
L = gap between door and frame

- Stamped steel
- Cup depth 11 mm (7/16")
- Opening 106° degrees
- K fixed at 2.5 mm (3/32")
- L = 4.6 mm
- For overlays from 1/4" through 3/4" the "A" value = 8.3 mm for (21/64") square edge doors at 90° opening.
- For overlays from 1" through 1-7/16" the "A" value = 5.2 mm for 3/4" square edge doors at 90° opening

Frame cabinet.
Mueble con marco.



D = Cobertura de la puerta sobre el lateral
T = Espesor máx. de la puerta
K = Distancia taladro
A = Parte no cubierta del lateral
L = Distancia interna entre puerta y marco

- Acero moldeado
- Profundidad de la cazoleta 11 mm (7/16")
- Abertura 106°
- K fijo a 2.5 mm (3/32")
- L = 4.6 mm
- Para coberturas desde 1/4" hasta 3/4", el valor "A" = 8.3 mm (21/64") para puertas con esquina viva abertura 90°.
- Para coberturas desde 1" hasta 1-7/16" el valor "A" = 5.2 para puertas con esquina viva abertura 90°.